

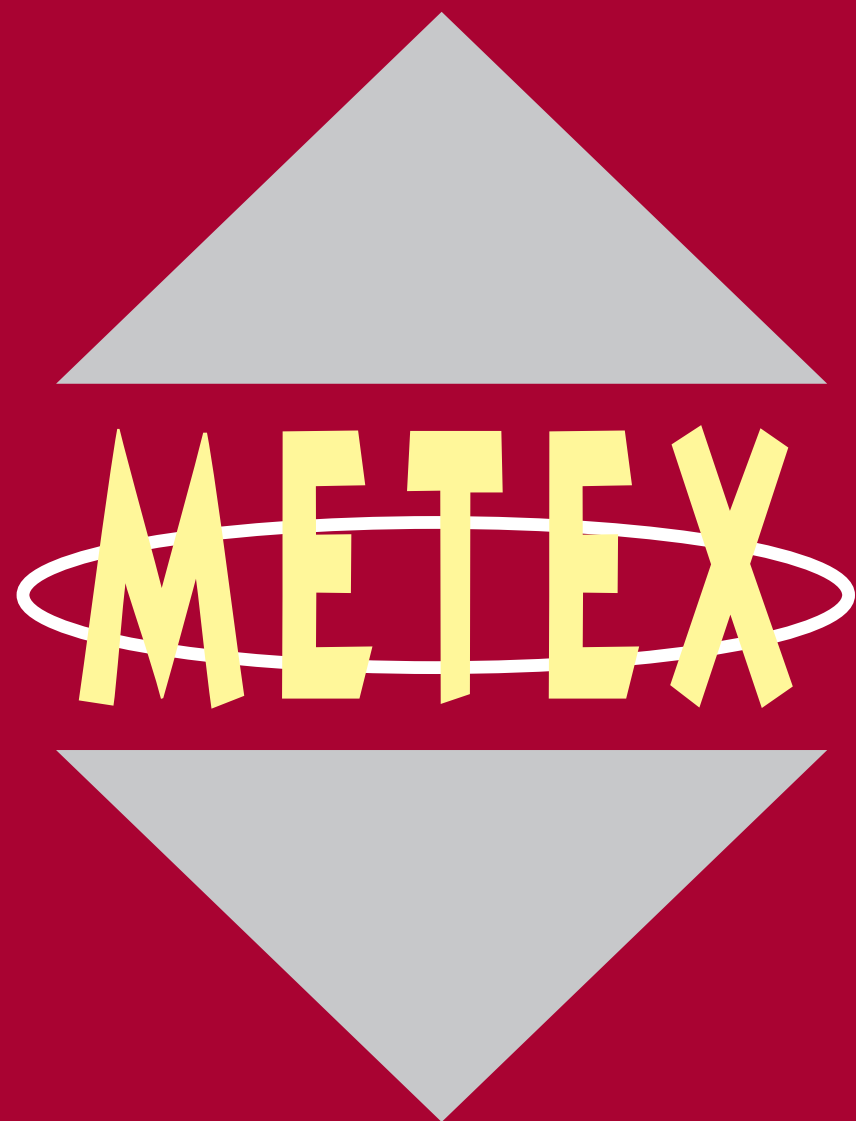


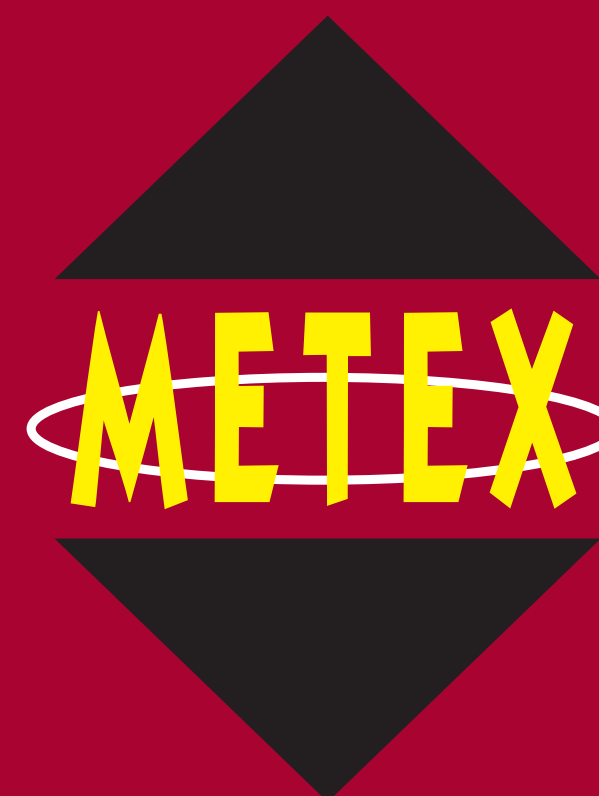

METEX PRODUCTS

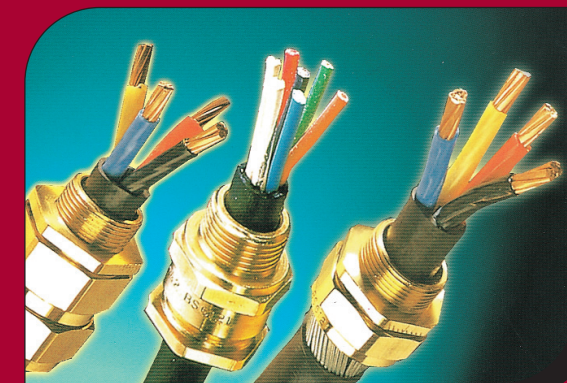

Marketed by:
Alpha Star TRADING


UK Office: Tel: 020 8552 4105, Fax: 020 8552 8865. 314, High Street North,
Manor Park, London E12 6SA. Email: exportsales@fsmail.net

Abu Dhabi, UAE:
Al Falah Tower, 7th Floor
Flat No: 701, Muroor Road
P. O. Box 31737
Tel: 971 2 4913419
Fax: 971 2 4913420
Email: astarauh@eim.ae




Doha, Qatar:
Grand Hamad Street
Old Doha Bank Building, Opposite: Arab Bank
Floor No: 4 - Room No: 401
Post Box: 55741, Doha, Qatar
Tel: 44683982, Fax: 44580844
Email: alphastar@qatar.net.qa

Dubai, UAE:
P.O. Box 80955, Al Quoz, Third Interchange
Tel: 971 4 3307263 Fax: 971 4 3306242 Email: astartrd@eim.ae

Chennai, India:
M/s Alpha Star Trading (P) Ltd.
#145 (old #77), Ground Floor
Perambur Barracks Road
Vepery, Chennai - 600 007
Telefax: +91 44 42822367
Email: fareed@alphastarindia.com

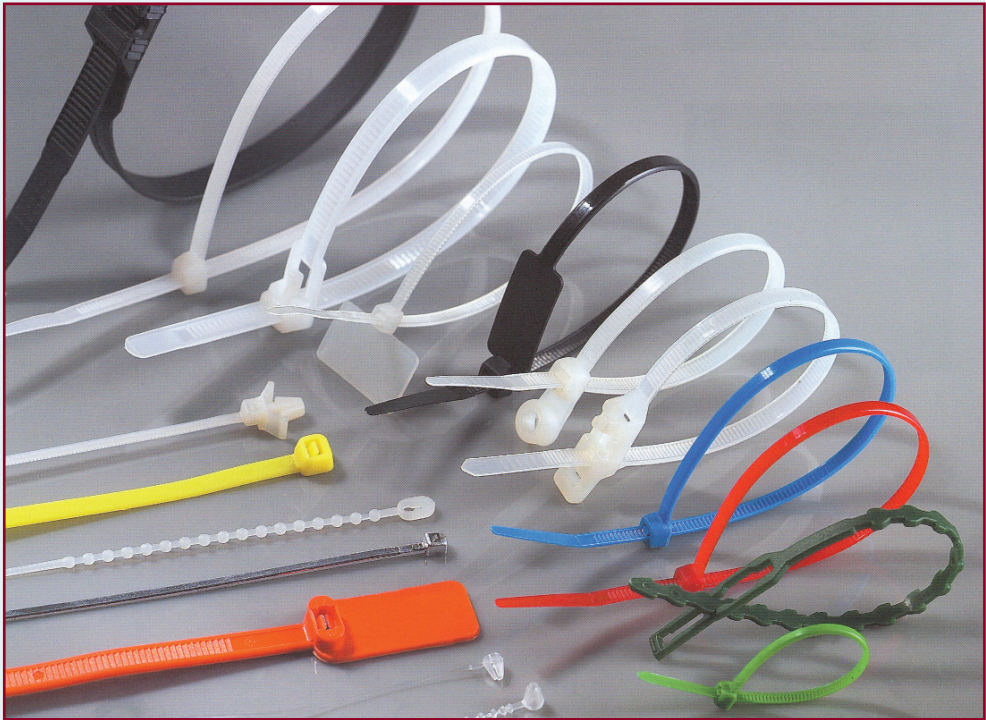

NYLON CABLE TIES SERIES

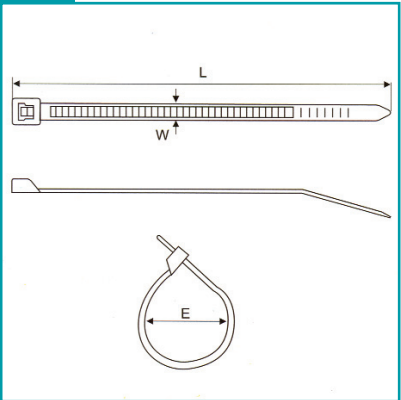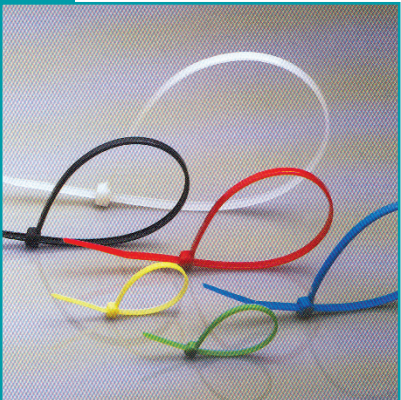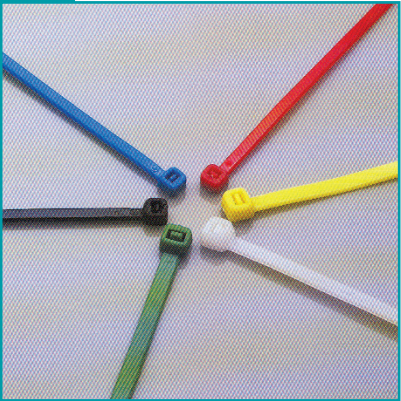

NYLON CABLE TIE

Material: Nylon 66, 94V-2 certificated by UL. Heat-resisting, erosion control, insulate well and not apt to age.

Color: Natural (or white, standard color), UV black and other colors are available as requested.

ITEM NO.	L		W MM	E BUNDLE DIAMETER MM	TENSILE STRENGTH	
	INCH	MM			LBS	KGS
HT-2.5×60	2.4"	60	2.5	2-11	18	8
HT-2.5×80	3.2"	80		2-16		
HT-2.5×100	4.0"	100		2-22		
HT-2.5×120	4.7"	120		2-30		
HT-2.5×150	6.0"	150		2-35		
HT-2.5×160	6.3"	160		2-40		
HT-2.5×200	8.0"	200		3-50		
HT-3.6×140	5.5"	140	3.6	3-33	40	18
HT-3.6×150	6.0"	150		3-35		
HT-3.6×180	7.1"	180		3-42		
HT-3.6×200	8.0"	200		3-50		
HT-3.6×250	10"	250		3-65		
HT-3.6×280	11"	280		3-70		
HT-3.6×300	12"	300		3-80		
HT-3.6×370	14.6"	370		3-105		
HT-4.8×120	4.7"	120	4.8	3-30	50	22
HT-4.8×160	6.3"	160		3-40		
HT-4.8×180	7.1"	180		3-42		
HT-4.8×190	7.5"	190		3-46		
HT-4.8×200	8.0"	200		3-50		
HT-4.8×250	10"	250		3-65		
HT-4.8×280	11"	280		3-70		
HT-4.8×300	12"	300		3-80		
HT-4.8×350	14"	350		3-90		
HT-4.8×360	14.2"	360		3-94		
HT-4.8×370	14.6"	370		3-98		
HT-4.8×380	15"	380		3-102		
HT-4.8×400	16"	400		3-105		
HT-4.8×430	16.9"	430		3-120		
HT-4.8×450	17.7"	450		3-130		
HT-4.8×500	19.7"	500		3-150		
HT-7.2×150	6.0"	150	7.2	3-35	120	55
HT-7.2×200	8.0"	200		3-50		
HT-7.2×250	10"	250		4-65		
HT-7.2×280	11"	280		4-78		
HT-7.2×300	12"	300		4-80		
HT-7.2×350	14"	350		4-90		
HT-7.2×370	14.6"	370		4-98		
HT-7.2×380	15"	380		4-100		
HT-7.2×400	16"	400		4-105		
HT-7.2×450	18"	450		4-110		
HT-7.2×500	20"	500		4-150		
HT-7.2×530	20.9"	530		4-160		
HT-7.2×550	21.6"	550		4-165		




ITEM NO.	L		W MM	E BUNDLE DIAMETER MM	TENSILE STRENGTH	
	INCH	MM			LBS	KGS
HT-9.0×400	16"	400	9.0	8-105	175	79.4
HT-9.0×450	18"	450		8-118		
HT-9.0×500	20"	500		8-150		
HT-9.0×550	21.6"	550		8-160		
HT-9.0×600	23.6"	600		8-170		
HT-9.0×650	25.6"	650		8-185		
HT-9.0×720	28.3"	720		10-195		
HT-9.0×800	31.5"	800		10-230		
HT-9.0×900	35.5"	900		10-265		
HT-9.0×1000	29.4"	1000		10-300		
HT-9.0×1100	43.3"	1100		10-335		
HT-9.0×1200	47.2"	1200		10-370		
HT-12×650	25.6"	650	12	14-185	250	114
HT-12×900	25.5"	900		14-265		

MOUNTABLE HEAD TIES

Material: Nylon 66 certificated by UL.
Usage: after bundling wires, fix them on plate
with screw.



ITEM NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		PACKING
	INCH	MM			LBS	KGS	
HT-100MH	4"	100	2.5	22	18	8.0	100PCS
HT-100MA	4"	100	3.6	22	40	18	
HT-150MH	6"	150		32			
HT-200MH	8"	200	4.8	42	50	22	
HT-300MH	12"	300	4.8	80	50	22	



(CARD BAND)

Material: Polyethylene PE
Usage: Wrap electrical cords for shipping and packaging. Inexpensive and Releasable.
Color: Clear, Black


ITEM NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		PACKING
	INCH	MM			LBS	KGS	
HT-100CB	4"	100	=	25	18	8	100PCS
HT-120CB	4.7"	120		30			
HT-150CB	6"	150	=	39	30	14	

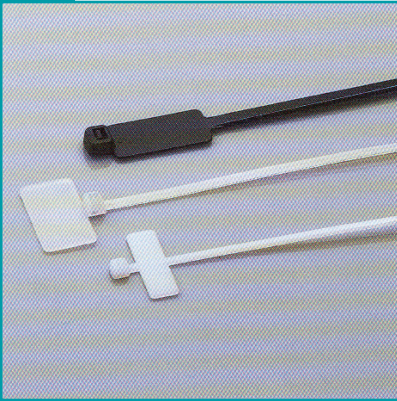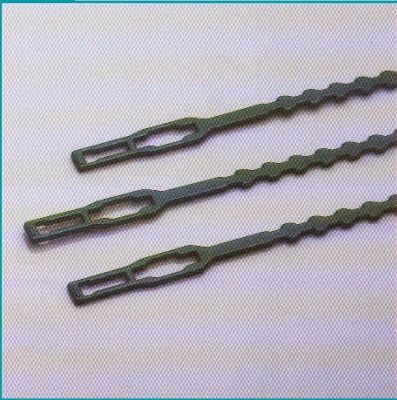

MARKER TIES

Material: Nylon 66 94V-2 certificated by UL. Acidcontrol and not easy to age.
Usage: No blank tag at the entrance of cable tie, then write down the marker on the tag.


ITEM.NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		MM
	INCH	MM			LBS	KGS	
HT-100MT	4"	100	2.5	22	18	8.0	25×8
HT-200MT	8"	200	4.6	50	50	22.0	4.6×200



RELEASABLE CABLE TIE

Material: Nylon 66 certificated by UL.
Usage: These ties, which are easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.



ITEM.NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		PACKING
	INCH	MM			LBS	KGS	
HT-150RT	6"	150	7.2	35	50	22	100PCS
HT-200RT	8"	200		50			
HT-250RT	10"	250		65			
HT-300RT	11"	300		70			




PUSH MOUNT TIES

Material: Nylon 66, 94V-2, agreed by UL. Acid and corrode resisting, insulate, last long and not apt to age.
Usage: insert tie to the hole of table and tighten it.

ITEM.NO.	L		W MM	MAX.BUNDLE DIA. MM	TENSILE STRENGTH		HOLE DIA		PANEL THICKNESS		PACKING
	INCH	MM			LBS	KGS	INCH	MM	INCH	MM	
HT-100PT	4"	100	2.5	22	18	8.0	0.189	4.8	0.094	2.4	100PCS

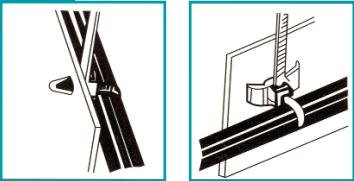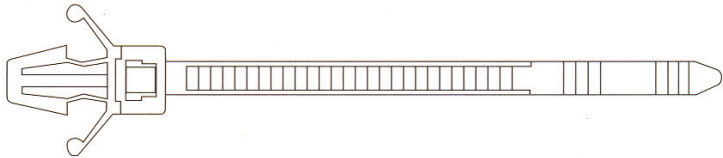


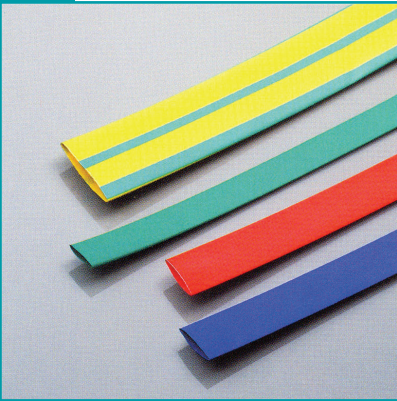

HEAT-SHRINKABLE TUBINGS

Apporved date:
UL2240,105℃,660V,VW-1,CSA,125℃,660V,OFT
F:105℃(UL,CSA) F2: 125℃(UL,CSA) F32: 125℃(UL,CSA)

ITEM NO.	AS SUPPLIED		AFTER SHRINKAGE		PACKING (M/ROLL)
	I.D(mm)	THICKNESS	I.D(mm)	THICKNESS	
HT-1	1.0	0.2±0.05	0.5	0.4±0.05	400
HT-1.5	1.5	0.2±0.05	0.75	0.4±0.05	300
HT-2	2.0	0.25±0.05	1.0	0.45±0.1	200
HT-2.5	2.5	0.25±0.05	1.25	0.45±0.1	
HT-3	3.0	0.25±0.05	1.5	0.45±0.1	
HT-3.5	3.5	0.25±0.05	1.75	0.45±0.1	
HT-4	4.0	0.25±0.05	2.0	0.45±0.1	
HT-5	5.0	0.35±0.05	2.5	0.55±0.1	
HT-6	6.0	0.35±0.05	3.0	0.55±0.1	
HT-7	7.0	0.35±0.05	3.5	0.55±0.1	
HT-8	8.0	0.35±0.05	4.0	0.55±0.1	100
HT-9	9.0	0.35±0.05	4.5	0.55±0.1	
HT-10	10.0	0.35±0.05	5.0	0.60±0.1	
HT-11	11.0	0.35±0.05	5.5	0.60±0.1	
HT-12	12.0	0.35±0.1	6.0	0.70±0.1	
HT-13	13.0	0.35±0.1	6.5	0.70±0.1	
HT-14	14.0	0.35±0.1	7.0	0.70±0.1	
HT-15	15.0	0.35±0.1	7.5	0.70±0.1	50
HT-16	16.0	0.35±0.1	8.0	0.70±0.1	
HT-17	17.0	0.35±0.1	8.5	0.70±0.1	
HT-18	18.0	0.4±0.1	9.0	0.80±0.1	
HT-20	20.0	0.5±0.1	10.0	0.90±0.1	25
HT-22	22.0	0.5±0.1	11.0	0.90±0.1	
HT-25	25.0	0.5±0.1	12.5	0.90±0.1	
HT-28	28.0	0.5±0.1	14.0	0.90±0.1	
HT-30	30.0	0.5±0.1	15.0	1.00±0.2	
HT-35	35.0	0.5±0.1	17.5	1.00±0.2	
HT-40	40.0	0.5±0.1	20.0	1.00±0.2	
HT-50	50.0	0.5±0.1	25.0	1.00±0.2	
HT-60	60.0	0.6±0.1	30.0	1.20±0.2	
HT-70	70.0	0.6±0.1	35.0	1.20±0.2	
HT-80	80.0	0.6±0.1	40.0	1.20±0.2	25
HT-90	90.0	0.6±0.1	45.0	1.30±0.2	
HT-100	100.0	0.7±0.1	50.0	1.30±0.2	

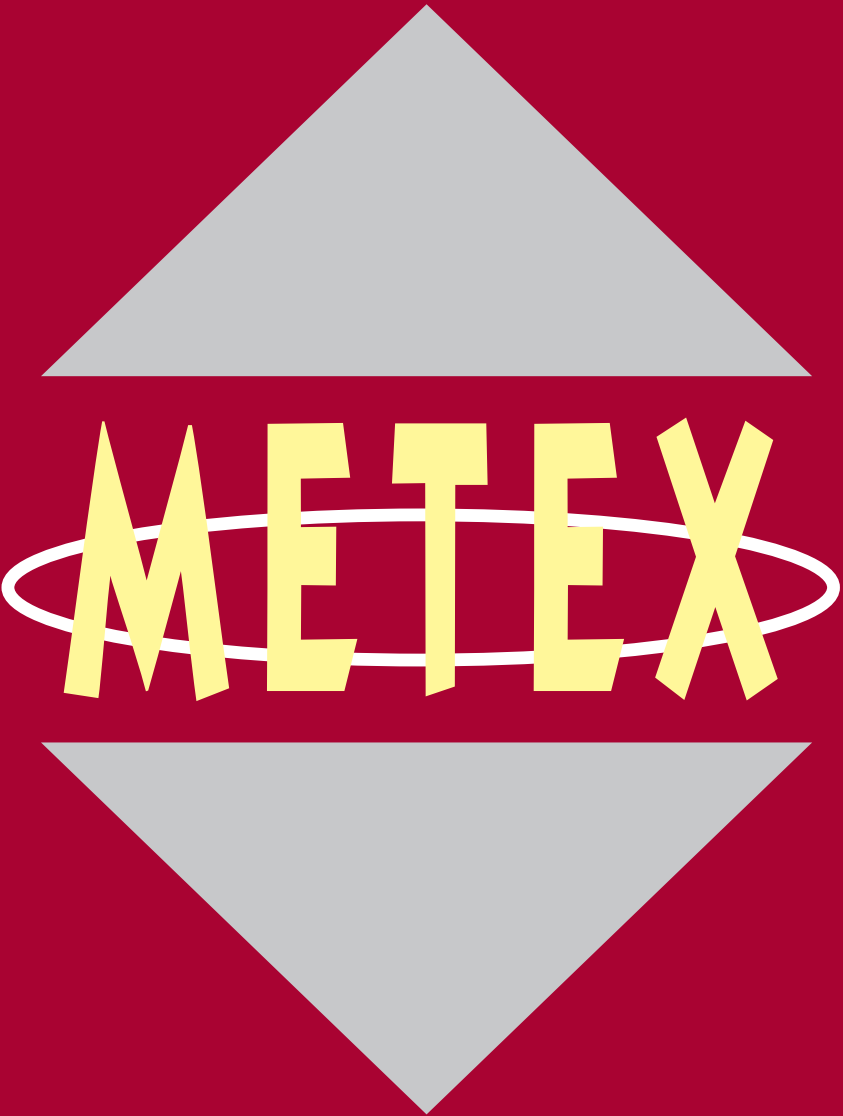

METEX PRODUCTS



Marketed by:
Alpha Star TRADING

Dubai, UAE:
P.O. Box 80955, Al Quoz, Third Interchange
Tel: 971 4 3307263 Fax: 971 4 3306242 Email: astartrd@eim.ae

UK Office: Tel: 020 8552 4105, Fax: 020 8552 8865. 314, High Street North,
Manor Park, London E12 6SA. Email: exportsales@fsmail.net

Abu Dhabi, UAE:
Al Falah Tower, 7th Floor
Flat No: 701, Muroor Road
P. O. Box 31737
Tel: 971 2 4913419
Fax: 971 2 4913420
Email: astarauh@eim.ae

Doha, Qatar:
Grand Hamad Street
Old Doha Bank Building, Opposite: Arab Bank
Floor No: 4 - Room No: 401
Post Box: 55741, Doha, Qatar
Tel: 44683982, Fax: 44580844
Email: alphastar@qatar.net.qa

Chennai, India:
M/s Alpha Star Trading (P) Ltd.
#145 (old #77), Ground Floor
Perambur Barracks Road
Vepery, Chennai - 600 007
Telefax: +91 44 42822367
Email: fareed@alphastarindia.com