

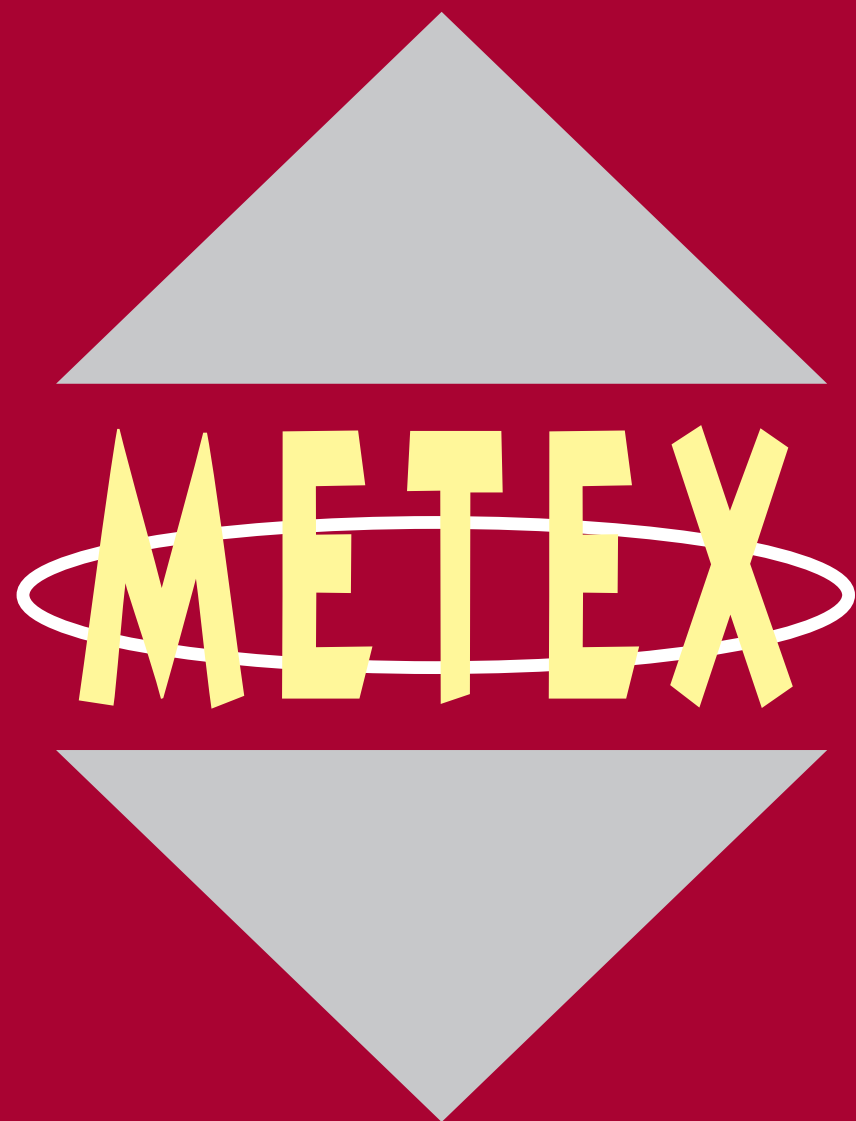


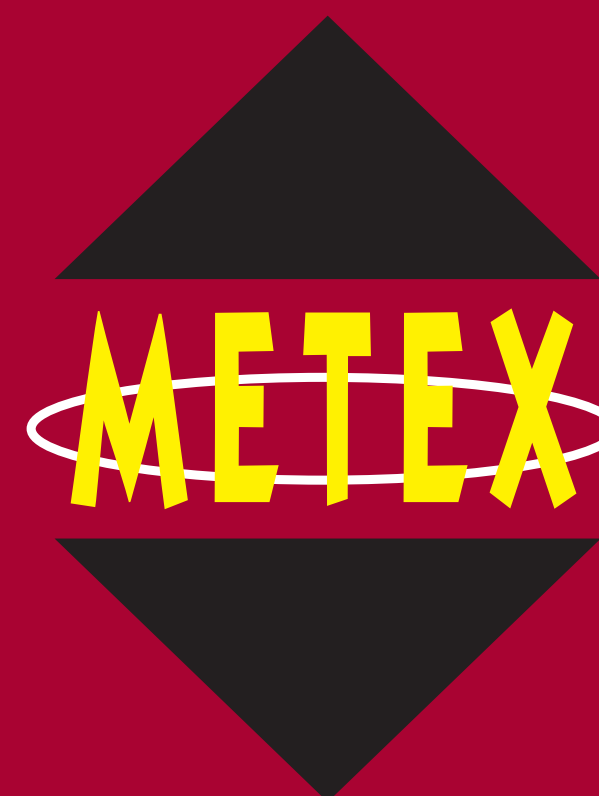

METEX PRODUCTS

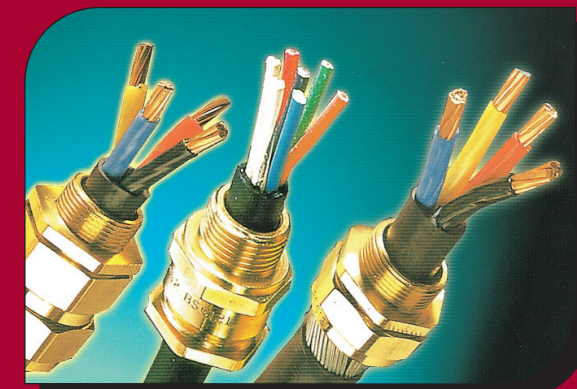

Marketed by:
Alpha Star TRADING



UK Office: Tel: 020 8552 4105, Fax: 020 8552 8865. 314, High Street North,
Manor Park, London E12 6SA. Email: exportsales@fsmail.net

Abu Dhabi, UAE:
Al Falah Tower, 7th Floor
Flat No: 701, Muroor Road
P. O. Box 31737
Tel: 971 2 4913419
Fax: 971 2 4913420
Email: astarauh@eim.ae

Doha, Qatar:
Grand Hamad Street
Old Doha Bank Building, Opposite: Arab Bank
Floor No: 4 - Room No: 401
Post Box: 55741, Doha, Qatar
Tel: 44683982, Fax: 44580844
Email: alphastar@qatar.net.qa

Dubai, UAE:
P.O. Box 80955, Al Quoz, Third Interchange
Tel: 971 4 3307263 Fax: 971 4 3306242 Email: astartrd@eim.ae

Chennai, India:
M/s Alpha Star Trading (P) Ltd.
#145 (old #77), Ground Floor
Perambur Barracks Road
Vepery, Chennai - 600 007
Telefax: +91 44 42822367
Email: fareed@alphastarindia.com

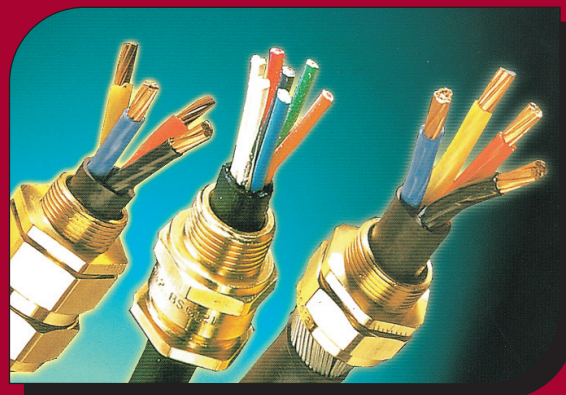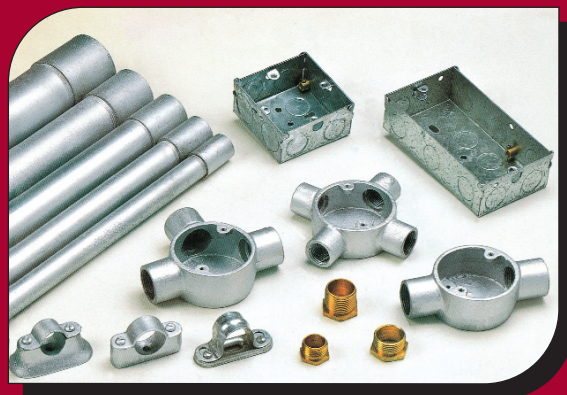


WIRING ACCESSORIES SERIES




HEAT-SHRINKABLE TUBINGS

Apporved date:
UL2240,105℃,660V,VW-1,CSA,125℃,660V,OFT
F:105℃(UL,CSA) F2: 125℃(UL,CSA) F32: 125℃(UL,CSA)

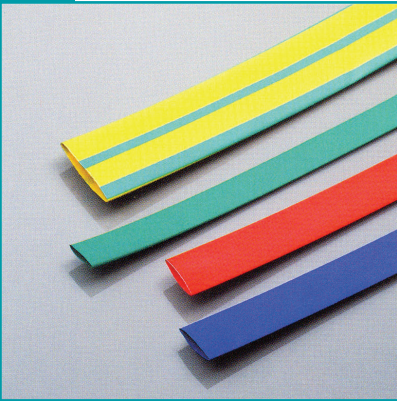

ITEM NO.	AS SUPPLIED		AFTER SHRINKAGE		PACKING (M/ROLL)
	I.D(mm)	THICKNESS	I.D(mm)	THICKNESS	
HT-1	1.0	0.2±0.05	0.5	0.4±0.05	400
HT-1.5	1.5	0.2±0.05	0.75	0.4±0.05	300
HT-2	2.0	0.25±0.05	1.0	0.45±0.1	200
HT-2.5	2.5	0.25±0.05	1.25	0.45±0.1	
HT-3	3.0	0.25±0.05	1.5	0.45±0.1	
HT-3.5	3.5	0.25±0.05	1.75	0.45±0.1	100
HT-4	4.0	0.25±0.05	2.0	0.45±0.1	
HT-5	5.0	0.35±0.05	2.5	0.55±0.1	
HT-6	6.0	0.35±0.05	3.0	0.55±0.1	
HT-7	7.0	0.35±0.05	3.5	0.55±0.1	
HT-8	8.0	0.35±0.05	4.0	0.55±0.1	
HT-9	9.0	0.35±0.05	4.5	0.55±0.1	
HT-10	10.0	0.35±0.05	5.0	0.60±0.1	
HT-11	11.0	0.35±0.05	5.5	0.60±0.1	
HT-12	12.0	0.35±0.1	6.0	0.70±0.1	
HT-13	13.0	0.35±0.1	6.5	0.70±0.1	50
HT-14	14.0	0.35±0.1	7.0	0.70±0.1	
HT-15	15.0	0.35±0.1	7.5	0.70±0.1	
HT-16	16.0	0.35±0.1	8.0	0.70±0.1	
HT-17	17.0	0.35±0.1	8.5	0.70±0.1	
HT-18	18.0	0.4±0.1	9.0	0.80±0.1	25
HT-20	20.0	0.5±0.1	10.0	0.90±0.1	
HT-22	22.0	0.5±0.1	11.0	0.90±0.1	
HT-25	25.0	0.5±0.1	12.5	0.90±0.1	
HT-28	28.0	0.5±0.1	14.0	0.90±0.1	25
HT-30	30.0	0.5±0.1	15.0	1.00±0.2	
HT-35	35.0	0.5±0.1	17.5	1.00±0.2	
HT-40	40.0	0.5±0.1	20.0	1.00±0.2	
HT-50	50.0	0.5±0.1	25.0	1.00±0.2	
HT-60	60.0	0.6±0.1	30.0	1.20±0.2	
HT-70	70.0	0.6±0.1	35.0	1.20±0.2	
HT-80	80.0	0.6±0.1	40.0	1.20±0.2	
HT-90	90.0	0.6±0.1	45.0	1.30±0.2	25
HT-100	100.0	0.7±0.1	50.0	1.30±0.2	

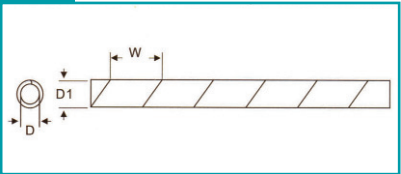

SPIRAL WRAPPING BAND

Material: Made from PE.
Usage: fix one end with safety belt first, then circlethe wires clockwise to make them tighen.
Application: a protection wear for electric wires, and make them insulation and look nice.

ITEM NO.	D	D1	W	WRAPPING RANGE (mm ϕ)	PACKING
HT-6	4	6	7.0	4×50	10m
HT-8	6	8	10.8	6×60	
HT-10	7.5	10	11.4	7.5×60	
HT-12	9	12	13.9	9×65	
HT-16	13	16	15.0	12×70	
HT-20	16	20	18.2	15×100	
HT-25	21	25	19.6	20×130	

ITEM NO.	SIZE	PACKING	
HT-15A	Φ 15mm	2.5m	10m
HT-20A	Φ 20mm		
HT-25A	Φ 25mm		
HT-30A	Φ 30mm		

METEX

METEX


NYLON CABLE GLAND

Material: UL Nylon 6/6; neoprene for seal insert, with nut

Color: Black, gray, light gray.

Protection: IP68


Temp. Resistance: -30°C to 80°C; short time 140°C suggested clearance hole for non-threaded mounting.

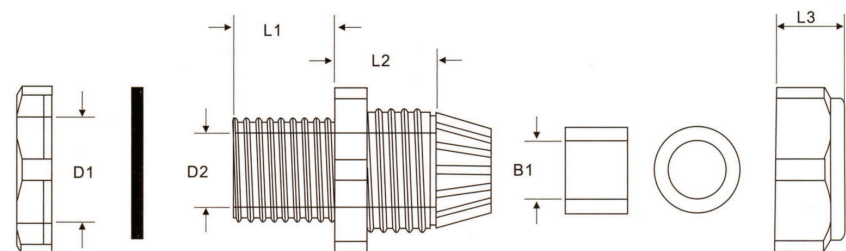

TYPE	D1	D1	PITCH	D2	B1	L1	L2	L3	CABLE RANGE	PACKING
HT-7	PG-7	12.1		8.0	6.0	8.0	12.8	13.4	3.5~6	50pcs
HT-9	PG-9	14.3		9.9	7.0	8.1	13.9	15.2	4~8	
HT-11	PG-11	18.23		13.2	9.6	8.2	15.4	18.3	5~10	
HT-13.5	PG-13.5	19.9	1.5	15.2	11.7	8.9	15.8	18.9	6~12	
HT-16	PG-16	22.1		17.2	12.9	8.9	17.3	19.7	10~14	
HT-21	PG-21	27.5		22.4	16.5	10.8	18.6	23.9	13~18	
HT-29	PG-29	36.2	1.5	30.6	23.2	10.9	20.5	27.4	18~25	25pcs
HT-36	PG-36	46.7		35.2	33.3	14.4	24.4	30.5	22~32	10pcs
HT-42	PG-42	52.2	1.5	39.3	39.6	14.6	25.4	31.6	30~38	
HT-48	PG-48	57.6		45.4	45.1	15.8	25.2	31.3	34~44	

PLASTIC CROSS

ITEM NO.	A(mm)	B(mm)	A(mm)	B(mm)
2	27	27	3	2
3	31	31	3	3
5	34	34	6	5
7	44	44	7	7
8	44	44	8	8
10	49	49	10	10

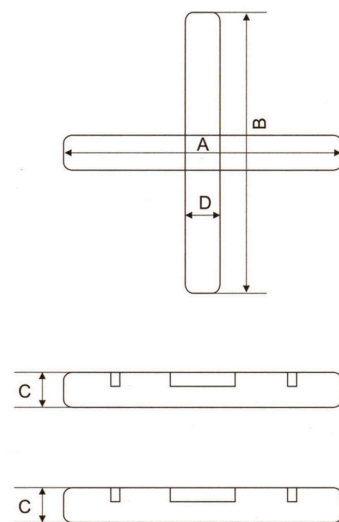

NYLON CLOSE-END WIRING CONNECTOR HT-($\phi 3$ - $\phi 8$)

Material: Silver-coated copper piece covered by UL. Appoved Nylon or PE.

How to use: put in the bare wire end into the cap and press wit clipper.

Application: Wire joining.

ITEM NO.	HT- $\phi 3$	HT- $\phi 4$	HT- $\phi 5$	HT- $\phi 6$	HT- $\phi 8$
$\phi 1$	3	3.15	3.66	4.66	5.7
$\phi 2$	7.3	8	8.5	10	12.5
$\phi 3$	9	9.75	10.5	12	14.7
L_1	19.5	20.4	22.5	25.2	26
L_2	6.5	6.5	7.5	7.8	8.8

WIRE CONNECTORS HT-($\phi 3$ - $\phi 8$)

Material: PVC, threaded, Heat-resistant and insulating.

How to use: Put the joint of two wires into the cap and screw it in until it is tight. wall to secure the cable.

Application: Wire joining.

ITEM NO.	A (mm)	B (mm)	C (mm)	Approx Wire Size	Std.PKg.
HT-P71	14.9	8.6	4.0	2 #18 3 #18	100PCS
HT-P72	17.8	10.7	4.0	2 #18 3 #18	1000PCS
HT-P73	21.9	10.8	4.48	2 #18 3 #18	100PCS
HT-P1	24.6	12.8	6.1	2 #18 3 #18	500PCS
HT-P2	30.1	15.3	7.0	2 #18 3 #18	100PCS 500PCS


METEX

TERMINAL BLOCKS

Terminal blocks: H,U(W),V(F)TYPE

Material: made from PA, PE OR PP.

ITEM NO.	L	A	H	M	B	mm ²	VOLT	AMP	PACKING
HT-3A	93	16	12	6	8	4	400V	3A	10PCS
HT-6A	115	15.7	13	6.5	9.5	6	400V	6A	
HT-10A	126	20.2	15.5	8.4	10.5	10	400V	10A	
HT-16A	139	23	17.7	10.3	12	12	400V	16A	
HT-20A	155	25	19.2	11.5	13.5	14	400V	20A	
HT-30A	171	26	20.5	12	14.5	16	400V	30A	
HT-60A	192	30	26	13.5	16.5	25	400V	60A	
HT-80A	205	33	27	15	17	35	400V	80A	
HT-100A	250	46	31	22	21	40	400V	100A	

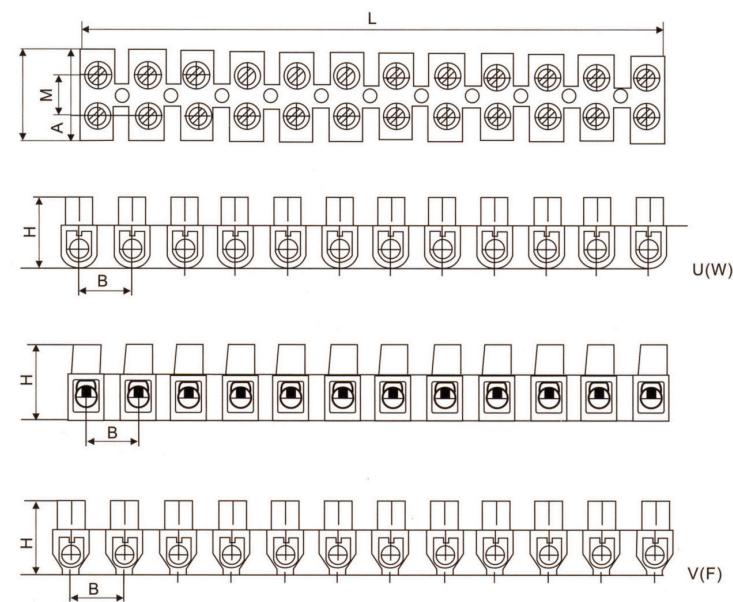

METEX

PACKING DETAILS H-1

U TYPE PACKING

ITEM NO.	PCS/BAG	PCS/CTN	CM	KG
3A-4mm	10	1500	41×29×27	26/25
5A-6mm	10	1200	48×24×29	26/25
6A-6mm	10	100	48×22×30	24/23
10A-10mm	10	800	42×27×30	26/25
15A-12mm	10	500	39×29×27	25/24
20A-14mm	10	500	37×28×27	26/25
30A-20mm	10	300	39.5×35.5×22	22/21
60A-25mm	10	200	39×31×28	24/23
80A-30mm	5	120	39×21.5×38	26/24
100A-40mm	5	50	54×25×20	18/17

H TYPE PACKING

ITEM NO	PCS/BAG	PCS/CTN	CM	KG
3A-4mm	10	1500	41×29×27	26/25
5A-6mm	10	1200	48×28×34	25/24
6A-6mm	10	100	47×24×30	25/24
10A-10mm	10	800	39×25×36	23/22
15A-12mm	10	500	36×28×37	27/26
20A-14mm	10	500	40×30×33	27/26
30A-20mm	10	300	37×34×23	23/22
60A-25mm	10	200	40×31×26	25/24
80A-30mm	5	120	39×31×26	26/24



ECM-TYPE WIRE MARKERS

Material: Soft PVC, concave conversed shape, no.code in sleeve,elasticity of in-diameter.
How to use: Peel each hack lightly
Feature: Suitable any size, special length and marking is available to order.

ITEM NO.	SUITABLE WIRE	IN-DIAMETER	LENGTH	No.	PACKING
GEC-0	18AWG 16AWG 0.75	2.0-3.0	3.5		1000PCS
GEC-1	0.75 1.25 2.0 3.0	3.0-5.2	4.0	0.9	1000PCS
GEC-2	3.5 5.5 8.0	3.6-7.4	5.0	A-Z +, -, ÷	500PCS
GEC-3	8.0 14.0 22.0	5.2-10.0	5.0		250PCS

EXPAND NAILS

Material:made from PE.
Color:White, Grey

ITEM.NO.	L (mm)	D (mm)	D (mm)	PACKING
EN-05				100PCS
EN-06	29.8	6.0	4.9	
EN-07				
EN-08	38.6	7.9	5.3	
EN-10	42.7	9.9	5.8	
EN-12	47.9	11.6	6.3	
EN-14				



METEX PRODUCTS



Marketed by:
Alpha Star TRADING

Dubai, UAE:
P.O. Box 80955, Al Quoz, Third Interchange
Tel: 971 4 3307263 Fax: 971 4 3306242 Email: astartd@eim.ae

UK Office: Tel: 020 8552 4105, Fax: 020 8552 8865. 314, High Street North,
Manor Park, London E12 6SA. Email: exportsales@fsmail.net

Abu Dhabi, UAE:
Al Falah Tower, 7th Floor
Flat No: 701, Muroor Road
P. O. Box 31737
Tel: 971 2 4913419
Fax: 971 2 4913420
Email: astarauh@eim.ae

Doha, Qatar:
Grand Hamad Street
Old Doha Bank Building, Opposite: Arab Bank
Floor No: 4 - Room No: 401
Post Box: 55741, Doha, Qatar
Tel: 44683982, Fax: 44580844
Email: alphastar@qatar.net.qa

Chennai, India:
M/s Alpha Star Trading (P) Ltd.
#145 (old #77), Ground Floor
Perambur Barracks Road
Vepery, Chennai - 600 007
Telefax: +91 44 42822367
Email: fareed@alphastarindia.com